



VISUAL V49, V64



Recycled Content




Intelligibility


VISUAL

V49

V64



A/58 mm
B/15 mm
C/6.35 mm
Open area: 45.6 %
Cut off angle: 18°



A/47.20 mm
B/15 mm
C/6.35 mm
Open area: 39.6 %
Cut off angle: 22°

MICROLOOK



MICROLOOK



Prelude XL²/TL 15 mm



Prelude XL²/TL 15 mm



600 x 600 x 19 mm


8580 M

8581 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
● V49 + fleece								
0.50(H)	0.50	0.10	0.30	0.40	0.50	0.75	0.90	α_p
Sound Absorption Class = D								
● V49 + fleece + 25 mm x 20 kg/m ³ fibreglass overlay								
0.95	0.90	0.35	0.80	0.95	0.90	1.00	1.00	α_p
Sound Absorption Class = A								

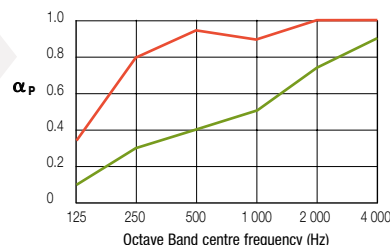

EN 13501-1

EEA Euroclass A2-s1, d0 (without overlay)

RUS KM1 (G1, V1, D1, T1) FZ 123



70 % RH



≈ 4 kg/m²

- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

www.armstrong.eu

Armstrong